

SIEMENS

Solid Edge 2025
Premium

© 2024 All rights reserved

Cloud
Partner

Digital Industries
Software

SIEMENS

Licentie

Nodelocked licentie activeren

In deze handleiding lees je hoe je een nodelocked licentie koppelt aan jouw computer. Wil je hem overzetten naar een ander systeem? Ook dat komt in deze handleiding aan bod.

Inhoud

Stap 1 • Licentiebeheer openen	4
Stap 2 • Sold-to selecteren	4
Stap 3 • Licentieomgeving openen	5
Stap 4 • Versie selecteren	6
Stap 5 • Create machine	7
Stap 6 • Remove products	10
Stap 7 • Assign products	13
Stap 8 • Generate License File	15
Stap 9 • Licentie instellen	16

Inleiding

Heb je een nieuwe Nodelocked licentie aangeschaft? De licentie die je ontvangt is opgezet als DEMO. Hierdoor kan je de licentie tijdelijk gebruiken. Dit geef jou de tijd om jouw systeem aan de licentie te koppelen. In deze handleiding lees je hoe je dit doet. Wil je op een later moment het gekoppelde systeem wijzigen? Je doet dat (met een extra stap) op dezelfde manier. Ook daarvoor gebruik je deze handleiding.

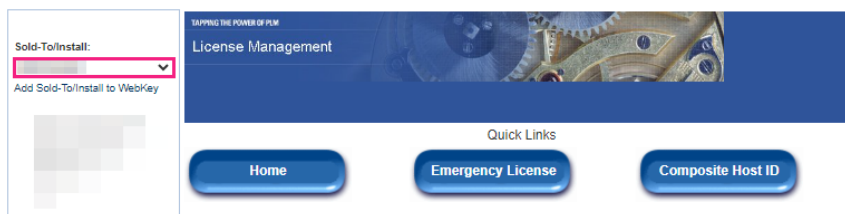
Stap 1 • Licentiebeheer openen

- Ga naar de [License management page](#) en log in met jouw webkey account.

Heb je nog geen webkey account of is deze niet bij jou bekend? Volg dan onze handleiding [Webkey account aanmaken](#) om er één aan te maken.

Stap 2 • Sold-to selecteren

- Selecteer de Sold-To waar je een licentie voor wilt genereren.



Select the license management function from below

Emergency Passwords and License Files

Obtain temporary passwords or emergency license files for PLM software products. These will allow you to start your systems for a limited time. Your Customer Service Representative will be notified that you requested this service.

Configuration Report

Display licenses needing to be registered for particular locations and machines.

Sold-To/Install

Display information on record regarding this Sold-To/Install.

Composite Host ID

The Composite Host ID (CID) entry and information page.

Passwords and License Files

Obtain passwords or license files for PLM software products.

Cloud Enabled License

Click here to change your license method from node locked to Cloud Enabled. Cloud Enabled licenses require an internet connection and user login. This change applies to all products on the Sold To/Install.

Product Activation

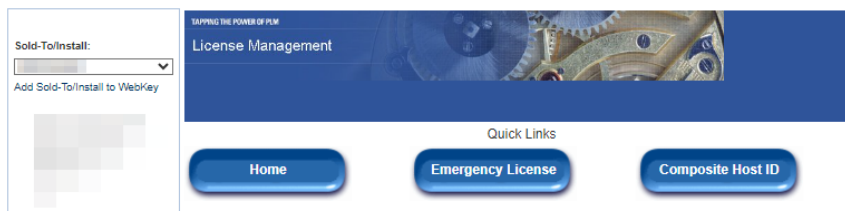
Click here to activate and maintain your Solid Edge node locked or I-Deas licenses

Bill-To

Display information on record regarding this Bill-To.

Stap 3 • Licentieomgeving openen

- Selecteer “Product Activation”



Select the license management function from below

Emergency Passwords and License Files

Obtain temporary passwords or emergency license files for PLM software products. These will allow you to start your systems for a limited time. Your Customer Service Representative will be notified that you requested this service.

Configuration Report

Display licenses needing to be registered for particular locations and machines.

Sold-To/Install

Display information on record regarding this Sold-To/Install.

Composite Host ID

The Composite Host ID (CID) entry and information page.

Passwords and License Files

Obtain passwords or license files for PLM software products.

Cloud Enabled License

Click here to change your license method from node locked to Cloud Enabled. Cloud Enabled licenses require an internet connection and user login. This change applies to all products on the Sold To/Install.

Product Activation

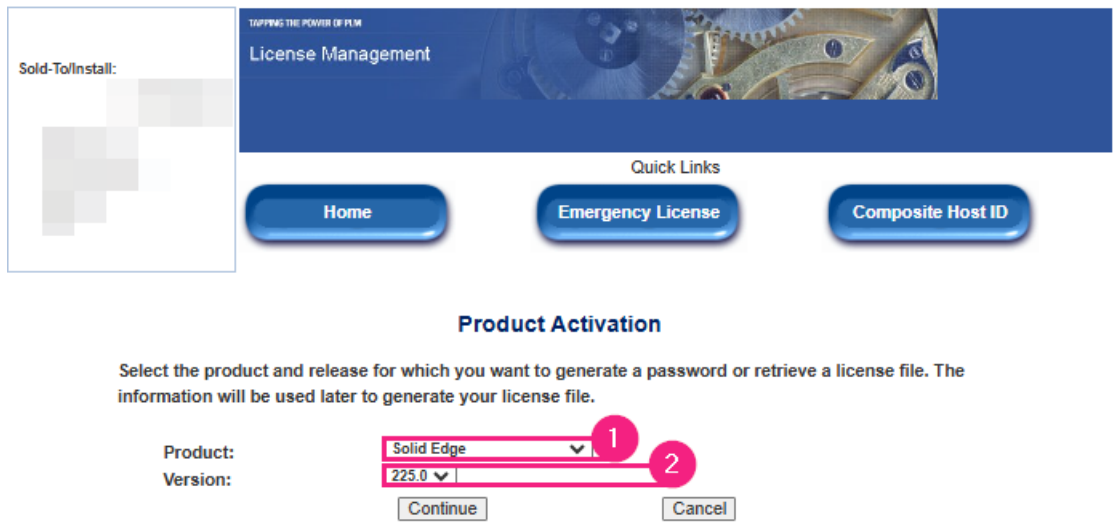
Click here to activate and maintain your Solid Edge node locked or I-Deas licenses

Bill-To

Display information on record regarding this Bill-To.

Stap 4 • Versie selecteren

- Selecteer Solid Edge als product (1). Geef ook de versie voor de licentie op (2).
 - Version 224.0 staat voor Solid Edge 2024.
 - De licentie is backwards compatible. Download daarom altijd de laatste versie. Een licentie met versie 224 zal bijvoorbeeld ook werken met Solid Edge versie 2022:
 - 219 werkt met Solid Edge versies ST5 – 2019.
 - 22x werkt met Solid Edge versies 2020 – 202x.



The screenshot shows the 'License Management' interface. On the left, there is a 'Solid-To/Install:' section with a blurred image. The main area has a blue header with 'TAPPING THE POWER OF PLM' and 'License Management'. Below the header, there are 'Quick Links' buttons: 'Home', 'Emergency License', and 'Composite Host ID'. The 'Product Activation' section is highlighted, with instructions: 'Select the product and release for which you want to generate a password or retrieve a license file. The information will be used later to generate your license file.' Below this, there are two dropdown menus: 'Product:' with 'Solid Edge' selected (marked with a red circle and '1'), and 'Version:' with '225.0' selected (marked with a red circle and '2'). At the bottom of these dropdowns are 'Continue' and 'Cancel' buttons.

Stap 5 • Create machine

In deze schermafbeelding zien we meerdere unassigned licenses (1). Deze zijn dus nog vrij om te koppelen aan een systeem. Onderaan zie je een lijst met computers (2) en de daaraan gekoppelde licenties. Ook zie je een computernaam met een sterretje (3). Dit betekent dat deze computer (nog) geen gekoppelde licenties heeft.

- Staat jouw computer nog niet in de lijst? Klik "Create New Machine" om hem aan te maken.

Product Activation

Step 1 : Click Create New Machine to activate a machine and assign products to it.
Step 2 : Click Generate License File to obtain your license after you have activated your machine(s). This license file will work on any one of the machines you have activated.
Step 3 : To edit the licensing of an existing machine click on the machine name.

[Create New Machine](#) [Generate License File](#) [Cancel](#)

Unassigned license(s):

ID	Lang	Description	Maintenance Expiration	License Type	Users
SE290	ENG	Solid Edge Classic - Floating		Demo	000000001
SE302	ENG	Solid Edge Design and Drafting -Node		Demo	000000002
SE306	ENG	Solid Edge Xpresroute Floating		Demo	000000002
SE351	ENG	Solid Edge Foundation Floating		Demo	000000001
SE352	ENG	Solid Edge 2D Drafting Floating		Demo	000000002
SE359F	ENG	Solid Edge Wiring and Harness Design		Demo	000000002
SE363F	ENG	Solid Edge PCB Design		Demo	000000002
SE375F		Solid Edge Embedded Client - Floating		Demo	000000002
SE382F		<i>Solid Edge Shape Search Server</i>		Demo	000000002
SE384F		<i>Solid Edge Shape Search User</i>		Demo	000000002
SE388F	ENG	Solid Edge Premium - Floating		Demo	000000001
SE391F	ENG	Solid Edge Design Configurator Standard		Demo	000000001

[Collapse Detail](#)

PC502()					
	SE290	ENG	Solid Edge Classic - Floating		Demo 000000001
	SE397F	ENG	Solid Edge P&ID Design - Floating		Demo 000000001
	SE446F	ENG	Solid Edge MBD		Demo 000000001
PC503()					
	SE351	ENG	Solid Edge Foundation Floating		Demo 000000001
PC504()					
	SE388F	ENG	Solid Edge Premium - Floating		Demo 000000001
	SE391F	ENG	Solid Edge Design Configurator Standard		Demo 000000001
	SE448F		Solid Edge Illustrations FL		Demo 000000001
3	Remove * PC501()				

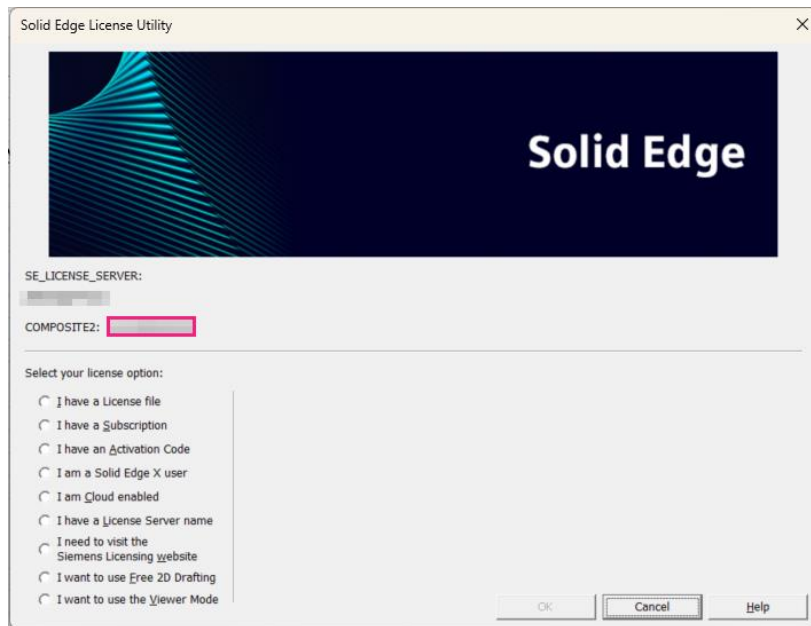
*Indicates machine with no products assigned.

-Bold/Italic text indicates a product whose maintenance has expired.

- Geef de naam van de computer op. Zorg dat deze voor jezelf en eventuele collega's herkenbaar is.

- Vul ook het SE-CID in. Deze vind je terug in de Solid Edge License Utility:
 - Typ "License Utility" in de zoekfunctie van het Windows startmenu.
 - De SE-CID is de COMPOSITE2 en zie je in het volgende scherm terug.

Opmerking: Heb je Solid Edge nog niet geïnstalleerd, dan vind je de "License Utility" niet. Volg eerst de installatiehandleiding om Solid Edge te installeren. Deze vind je op <https://enginia.nl/support/handleidingen/>.



- Heb je de Machine Name en SE-CID ingevuld? Klik dan op "Create"

Product Activation

Step 1: Enter the name of machine you want to activate. The machine name is used to identify this machine later should you want to edit it. Enter a name that is memorable and identifies the machine at your site.

Step 2: Enter the disk serial number (volume id) without the dash of the machine. The disk serial number is shown in the upper right corner of the Solid Edge License Utility delivered with Solid Edge. It is also shown as the Volume Serial Number if you run the vol c: command from a command prompt window.

Step 3: Click Create to create the machine.

Step 4: Click Assign Products to add products to the new machine.

Note The Solid Edge Composite ID (SE CID) is required for ST4 license files. If you are connected using the machine you are activating you can click Get Number to retrieve your SE CID value. To obtain the value manually download and run the SE CID utility on the machine you are activating. The utility can be downloaded from the [Siemens PLM FTP Server](#)

Machine Name:	PC505	Get Number
SE-CID:		

*Required field

Create	Assign Products	Cancel
--------	-----------------	--------

Note: If you are connected using the machine you are activating you can click Get Number to retrieve your disk information.

- Klik op “Assign Products” om een licentie aan deze computer te koppelen.

Product Activation

Step 1: Enter the name of machine you want to activate. The machine name is used to identify this machine later should you want to edit it. Enter a name that is memorable and identifies the machine at your site.

Step 2: Enter the disk serial number (volume id) without the dash of the machine. The disk serial number is shown in the upper right corner of the Solid Edge License Utility delivered with Solid Edge. It is also shown as the Volume Serial Number if you run the vol c: command from a command prompt window.

Step 3: Click Create to create the machine.

Step 4: Click Assign Products to add products to the new machine.

Note The Solid Edge Composite ID (SE CID) is required for ST4 license files. If you are connected using the machine you are activating you can click Get Number to retrieve your SE CID value. To obtain the value manually download and run the SE CID utility on the machine you are activating. The utility can be downloaded from the Siemens PLM FTP Server

Machine Name:* PC505
SE-CID:*

*Required field

Create **Assign Products** Cancel

Note: If you are connected using the machine you are activating you can click Get Number to retrieve your disk information.

- Wil je een Nodelocked licentie aan een andere computer koppelen? Ontkoppel deze dan eerst van de huidige computer. Ga hiervoor naar de volgende stap. Activeer je een nieuwe licentie, sla deze stap dan over en ga gelijk door naar Stap 7 • Assign products.

Stap 6 • Remove products

- Onder het kopje “Unassigned licenses” zul je de te koppelen licentie niet zien staan. Klik daarom op “Finish”.

Machine : PC505()

[Assign Products](#)

[Remove Products](#)

Product Assign on:PC505()

ID	Product ID	Lang	Description	Maintenance Expiration	License Type	Available Quantity
----	------------	------	-------------	------------------------	--------------	--------------------

There are no products currently assigned to this machine.

Unassigned license(s)

ID	Product ID	Lang	Description	Maintenance Expiration	License Type	Available Quantity	
	SE290	ENG	Solid Edge Classic - Floating		DEMO	000000001	Assign
	SE302	ENG	Solid Edge Design and Drafting -Node		DEMO	000000002	Assign
	SE306	ENG	Solid Edge Xpresroute Floating		DEMO	000000002	Assign
	SE351	ENG	Solid Edge Foundation Floating		DEMO	000000001	Assign
	SE352	ENG	Solid Edge 2D Drafting Floating		DEMO	000000002	Assign
	SE359F	ENG	Solid Edge Wiring and Harness Design		DEMO	000000002	Assign
	SE363F	ENG	Solid Edge PCB Design		DEMO	000000002	Assign
	SE375F		Solid Edge Embedded Client - Floating		DEMO	000000002	Assign
	SE388F	ENG	Solid Edge Premium - Floating		DEMO	000000001	Assign
	SE391F	ENG	Solid Edge Design Configurator Standard		DEMO	000000001	Assign
	SE395F		Solid Edge Generative Design Pro - Float		DEMO	000000002	Assign
	SE397F	ENG	Solid Edge P&ID Design - Floating		DEMO	000000001	Assign
	SE399H	ENG	Solid Edge Piping Design Add-on		DEMO	000000002	Assign
	SE421F	ENG	Solid Edge 2D Nesting		DEMO	000000002	Assign
	SE446F	ENG	Solid Edge MBD		DEMO	000000001	Assign
	SE448F		Solid Edge Illustrations FL		DEMO	000000001	Assign
	SE449F		Solid Edge 3D Publishing FL		DEMO	000000002	Assign
	SE450F	ENG	Simcenter FLOEFD for Solid Edge		DEMO	000000002	Assign
	SE461F	ENG	SE Technical Publications TC INT Add-on		DEMO	000000002	Assign
	SEDIST100		Solid Edge Distributor Bundle		DEMO	000000002	Assign
	TCRSDIST100		Teamcenter Rapid Start Dist Bundle		DEMO	000000002	Assign

[Finish](#)

- Selecteer de oude computer in de lijst.

Product Activation

Step 1 : Click Create New Machine to activate a machine and assign products to it.
 Step 2 : Click Generate License File to obtain your license after you have activated your machine(s). This license file will work on any one of the machines you have activated.
 Step 3 : To edit the licensing of an existing machine click on the machine name.

[Create New Machine](#) [Generate License File](#) [Cancel](#)

Unassigned license(s):

ID	Lang	Description	Maintenance Expiration	License Type	Users
SE290	ENG	Solid Edge Classic - Floating		Demo	000000001
SE302	ENG	Solid Edge Design and Drafting -Node		Demo	000000002
SE306	ENG	Solid Edge Xpresroute Floating		Demo	000000002
SE351	ENG	Solid Edge Foundation Floating		Demo	000000001
SE352	ENG	Solid Edge 2D Drafting Floating		Demo	000000002
SE359F	ENG	Solid Edge Wiring and Harness Design		Demo	000000002
SE363F	ENG	Solid Edge PCB Design		Demo	000000002
SE375F		Solid Edge Embedded Client - Floating		Demo	000000002
<i>SE382F</i>		<i>Solid Edge Shape Search Server</i>		<i>Demo</i>	<i>000000002</i>
<i>SE384F</i>		<i>Solid Edge Shape Search User</i>		<i>Demo</i>	<i>000000002</i>
SE388F	ENG	Solid Edge Premium - Floating		Demo	000000001
SE391F	ENG	Solid Edge Design Configurator Standard		Demo	000000001

[Collapse Detail](#)

PC502()							
	SE290	ENG	Solid Edge Classic - Floating		Demo	000000001	
	SE397F	ENG	Solid Edge P&ID Design - Floating		Demo	000000001	
	SE446F	ENG	Solid Edge MBD		Demo	000000001	
PC503()							
	SE351	ENG	Solid Edge Foundation Floating		Demo	000000001	
PC504()							
	SE388F	ENG	Solid Edge Premium - Floating		Demo	000000001	
	SE391F	ENG	Solid Edge Design Configurator Standard		Demo	000000001	
	SE448F		Solid Edge Illustrations FL		Demo	000000001	
Remove	* PC501()						

*Indicates machine with no products assigned.
 -Bold/Italic text indicates a product whose maintenance has expired.

- Ontkoppel de licentie van de oude computer via "Remove" (1).
- Klik vervolgens op "Finish" (2).

Product Activation

Select the product(s) to Remove from this machine. To assign Items to this machine click the Assign Products tab.
 Note: To successfully license and run your applications, make sure that you have selected a single standalone product for your machine.
 Standalone products are Solid Edge Classic, Foundation, Design and Drafting and Insight.

Machine : PC503()

[Assign Products](#) [Remove Products](#)

ID	Product ID	Lang	Description	Maintenance Expiration	License Type	Available Quantity	Remove One
BFAFB96385BF	SE351	ENG	Solid Edge Foundation Floating		DEMO	000000001	Remove 1
			Finish 2				

- Is de oude computer helemaal niet meer in gebruik? Om verwarring te voorkomen, kun je deze uit het overzicht verwijderen. Klik hiervoor op "Remove".

Product Activation

Step 1 : Click Create New Machine to activate a machine and assign products to it.
 Step 2 : Click Generate License File to obtain your license after you have activated your machine(s). This license file will work on any one of the machines you have activated.
 Step 3 : To edit the licensing of an existing machine click on the machine name.

[Create New Machine](#) [Generate License File](#) [Cancel](#)

Unassigned license(s):

ID	Lang	Description	Maintenance Expiration	License Type	Users
SE290	ENG	Solid Edge Classic - Floating		Demo	000000001
SE302	ENG	Solid Edge Design and Drafting -Node		Demo	000000002
SE306	ENG	Solid Edge Xpresroute Floating		Demo	000000002
SE351	ENG	Solid Edge Foundation Floating		Demo	000000001
SE352	ENG	Solid Edge 2D Drafting Floating		Demo	000000002
SE359F	ENG	Solid Edge Wiring and Harness Design		Demo	000000002
SE363F	ENG	Solid Edge PCB Design		Demo	000000002
SE375F		Solid Edge Embedded Client - Floating		Demo	000000002
SE382F		Solid Edge Shape Search Server		Demo	000000002
SE384F		Solid Edge Shape Search User		Demo	000000002
SE388F	ENG	Solid Edge Premium - Floating		Demo	000000001
SE391F	ENG	Solid Edge Design Configurator Standard		Demo	000000001

[Collapse Detail](#)

PC502(						
	SE290	ENG	Solid Edge Classic - Floating		Demo	000000001
	SE397F	ENG	Solid Edge P&ID Design - Floating		Demo	000000001
	SE446F	ENG	Solid Edge MBD		Demo	000000001
PC503(						
	SE351	ENG	Solid Edge Foundation Floating		Demo	000000001
PC504(						
	SE388F	ENG	Solid Edge Premium - Floating		Demo	000000001
	SE391F	ENG	Solid Edge Design Configurator Standard		Demo	000000001
	SE448F		Solid Edge Illustrations FL		Demo	000000001
Remove	* PC501(					

*Indicates machine with no products assigned.
 -Bold/Italic text indicates a product whose maintenance has expired.

Let op! Verwijderen je de computer uit dit overzicht? De licentie is dan nog steeds te gebruiken op het oude systeem. De-installeer de software van dit systeem of verwijder het licentiebestand om overuse te voorkomen.

Stap 7 • Assign products

- Selecteer de nieuwe computer.

Product Activation

Step 1 : Click Create New Machine to activate a machine and assign products to it.
 Step 2 : Click Generate License File to obtain your license after you have activated your machine(s). This license file will work on any one of the machines you have activated.
 Step 3 : To edit the licensing of an existing machine click on the machine name.




[Create New Machine](#) [Generate License File](#) [Cancel](#)

Unassigned license(s):






ID	Lang	Description	Maintenance Expiration	License Type	Users
SE290	ENG	Solid Edge Classic - Floating		Demo	000000001
SE302	ENG	Solid Edge Design and Drafting -Node		Demo	000000002
SE306	ENG	Solid Edge Xpresroute Floating		Demo	000000002
SE351	ENG	Solid Edge Foundation Floating		Demo	000000001
SE351	ENG	Solid Edge Foundation Floating		Demo	000000001
SE352	ENG	Solid Edge 2D Drafting Floating		Demo	000000002
SE359F	ENG	Solid Edge Wiring and Harness Design		Demo	000000002
SE363F	ENG	Solid Edge PCB Design		Demo	000000002
SE375F		Solid Edge Embedded Client - Floating		Demo	000000002
<i>SE382F</i>		<i>Solid Edge Shape Search Server</i>		<i>Demo</i>	<i>000000002</i>
<i>SE384F</i>		<i>Solid Edge Shape Search User</i>		<i>Demo</i>	<i>000000002</i>
SE388F	ENG	Solid Edge Premium - Floating		Demo	000000001

[Collapse Detail](#)

PC502()

	SE290	ENG	Solid Edge Classic - Floating		Demo	000000001
	SE397F	ENG	Solid Edge P&ID Design - Floating		Demo	000000001
	SE446F	ENG	Solid Edge MBD		Demo	000000001

PC504()

	SE388F	ENG	Solid Edge Premium - Floating		Demo	000000001
	SE391F	ENG	Solid Edge Design Configurator Standard		Demo	000000001
	SE448F		Solid Edge Illustrations FL		Demo	000000001

[Remove](#)

* PC505()

*Indicates machine with no products assigned.
 -Bold/Italic text indicates a product whose maintenance has expired.

- Kies een unassigned license die je aan de nieuw aangemaakte computer wilt koppelen. Selecteer in die regel “Assign” (1). Herhaal dit als er nog meer licenties aan het systeem wilt koppelen. Klik vervolgens op “Finish” (2).

Product Activation

Select the product(s) to assign to this machine. To remove items from this machine click the Remove Products tab.

Note: To successfully license and run your applications, make sure that you have selected a single standalone product for your machine. Standalone products are Solid Edge Classic, Foundation, Design and Drafting and Insight.

Machine : PC505()

[Assign Products](#) [Remove Products](#)

Product Assign on:PC505()

ID	Product ID	Lang	Description	Maintenance Expiration	License Type	Available Quantity
----	------------	------	-------------	------------------------	--------------	--------------------

There are no products currently assigned to this machine.

Unassigned license(s)

ID	Product ID	Lang	Description	Maintenance Expiration	License Type	Available Quantity	
	SE290	ENG	Solid Edge Classic - Floating		DEMO	000000001	Assign
	SE302	ENG	Solid Edge Design and Drafting -Node		DEMO	000000002	Assign
	SE306	ENG	Solid Edge Xpresroute Floating		DEMO	000000002	Assign
	SE351	ENG	Solid Edge Foundation Floating		DEMO	000000001	Assign
	SE351	ENG	Solid Edge Foundation Floating		DEMO	000000001	Assign
	SE352	ENG	Solid Edge 2D Drafting Floating		DEMO	000000002	Assign
	SE359F	ENG	Solid Edge Wiring and Harness Design		DEMO	000000002	Assign
	SE363F	ENG	Solid Edge PCB Design		DEMO	000000002	Assign
	SE375F		Solid Edge Embedded Client - Floating		DEMO	000000002	Assign
	SE388F	ENG	Solid Edge Premium - Floating		DEMO	000000001	Assign
	SE391F	ENG	Solid Edge Design Configurator Standard		DEMO	000000001	Assign
	SE395F		Solid Edge Generative Design Pro - Float		DEMO	000000002	Assign
	SE397F	ENG	Solid Edge P&ID Design - Floating		DEMO	000000001	Assign
	SE399H	ENG	Solid Edge Piping Design Add-on		DEMO	000000002	Assign
	SE421F	ENG	Solid Edge 2D Nesting		DEMO	000000002	Assign
	SE446F	ENG	Solid Edge MBD		DEMO	000000001	Assign
	SE448F		Solid Edge Illustrations FL		DEMO	000000001	Assign
	SE449F		Solid Edge 3D Publishing FL		DEMO	000000002	Assign
	SE450F	ENG	Simcenter FLOEFD for Solid Edge		DEMO	000000002	Assign
	SE461F	ENG	SE Technical Publications TC INT Add-on		DEMO	000000002	Assign
	SEDIST100		Solid Edge Distributor Bundle		DEMO	000000002	Assign
	TCRSDIST100		Teamcenter Rapid Start Dist Bundle		DEMO	000000002	Assign

[Finish](#)

Stap 8 • Generate License File

- Klik op "Generate License File".

Product Activation

Step 1 : Click Create New Machine to activate a machine and assign products to it.
 Step 2 : Click Generate License File to obtain your license after you have activated your machine(s). This license file will work on any one of the machines you have activated.
 Step 3 : To edit the licensing of an existing machine click on the machine name.

Unassigned license(s):

ID	Lang	Description	Maintenance Expiration	License Type	Users
SE290	ENG	Solid Edge Classic - Floating		Demo	000000001
SE302	ENG	Solid Edge Design and Drafting -Node		Demo	000000002
SE306	ENG	Solid Edge Xpresroute Floating		Demo	000000002
SE351	ENG	Solid Edge Foundation Floating		Demo	000000001
SE351	ENG	Solid Edge Foundation Floating		Demo	000000001

- Er volgt een pop-up met instructies. Klik op "OK"

www2.industrysoftware.automation.siemens.com says

If you have created your new machine and assigned products to it, perform the following steps:
complete activation:

Step 1: When the File Download dialog displays, click Save to save a copy of your license file to disk.

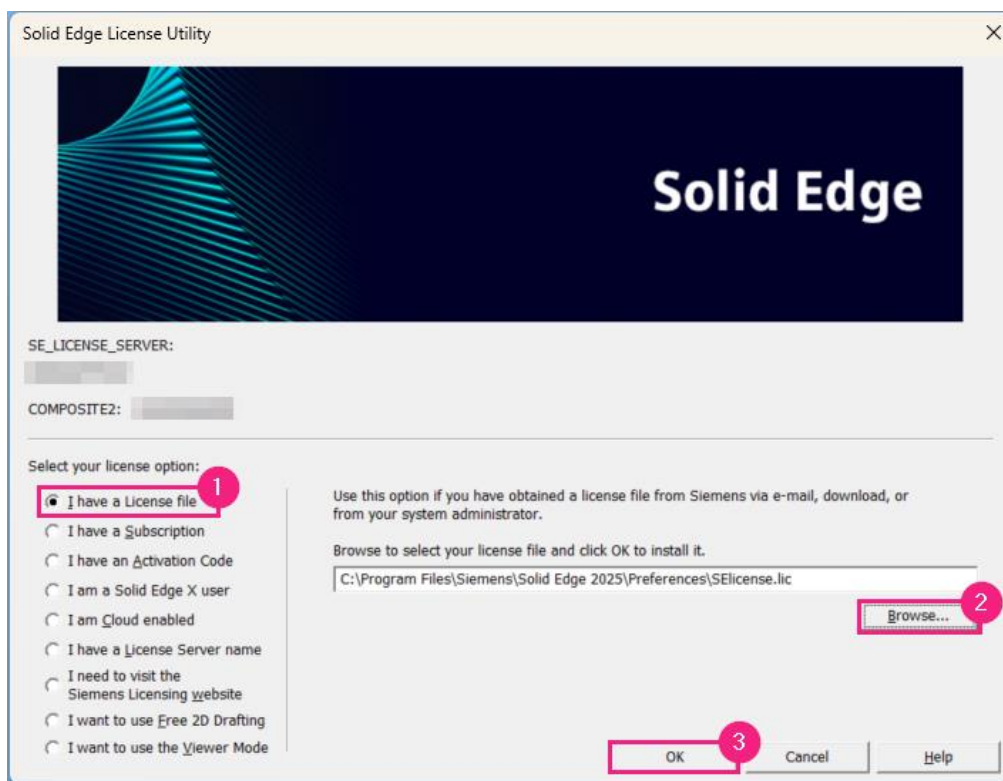
Step 2: Start the License Utility (located in the Solid Edge program group) and click the Browse button.

- Afhankelijk van de browserinstellingen:
 - Start de download van het licentiebestand vanzelf;
 - Zie je een pop-up om de locatie voor het licentiebestand te selecteren.
- Vervang de nieuwe licentie op alle systemen die deze licentie gebruikt.


Stap 9 • Licentie instellen

Start de License Utility weer op: Typ "License Utility" in de zoekfunctie van het Windows startmenu, of klik op de Windows Startknop > Blader naar het programma Siemens Solid Edge 202x" > License Utility.

1. Selecteer "I have a License file".
2. Browse naar het opgeslagen bestand.
3. Selecteer "OK".



Je krijgt de volgende melding:

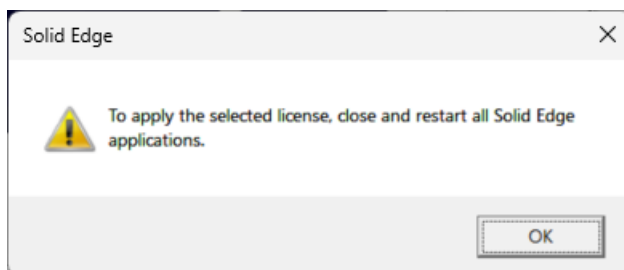

Het activatieproces is voltooid. Je kunt Solid Edge nu starten.

Vragen?

Als je na het lezen van de documentatie twijfels hebt over de procedure, neem dan contact op met onze Customer Service:

- Klantportaal: mijn.enginia.nl
- Telefoon: 085-4891717
- Mail: support@enginia.nl

Neem ook eens een kijkje bij onze [trainingen](#).